

P-760

Par Light




FEATURES

1. High brightness: Original Osram RGBW LED, 7X60W
2. 2.5°-60°, sharp beam & uniform wash
3. Super quiet
4. 40 LEE color macros
5. Memory function, Suitable for 1/2 channel mode . Easy control by non-lighting designer.
6. The Soft light diffusion film replaces the traditional barndoor, can rotatable; and can customize different specifications.

17CH	FUNCTION	17CH	FUNCTION
1	Red	10	Colour Macro
2	Red 16Bit	11	Strobe
3	Green	12	Dimmer
4	Green 16Bit	13	Dimmer 16Bit
5	Blue	14	Dimmer Mode
6	Blue 16Bit	15	Dimmer Speed
7	White	16	Zoom
8	White 16Bit	17	Reset
9	Colour Temperature		

Photometrics

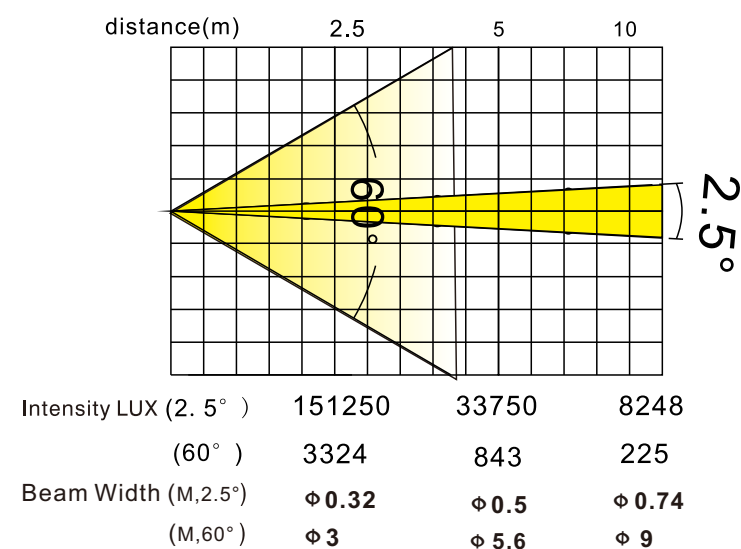

SPECIFICATION

OPTICS

- Light source: 7×60W Original OSRAM RGBW LEDs
7x60W RGBA LEDs(option)
7x60W RGBL LEDs(option)
- Lifetime: 50000 Hours
- Color temperature:
2700-10000K, linear adjustable

COLORS

- Linear RGBW, color mixing with unlimited colors
dynamic color macro effect with variable speed
- Super uniform light beam with no color shadows
and rich saturated and pastel colour-hues

EFFECT SECTION

- Wash, beam, effect modes, multiple macros
- Zoom: 2.5°-60°, 1:24 ratio
- Dimmer: 0-100% linear dimmer
- Strobe: Electronic strobe, 0.3-20Times/SEC
- Dedicated channel for color temperature setting

CONTROL AND PROGRAMMING

- Control mode: DMX512, 3-pin/5-pin XLR;
Protocols RDM; Wireless (option); Art-Net(option)
sACN(option)
- Standard moe: 17/12/9/7 channels
1/2 channel (SNAP-SHOT)
- Fan mode: NORMAL/PERFORMANCE/QUIET

OTHER FUNCTION

- 2.4inch color LCD screen
- High reliability touch button
- Support auto flip display
- Support Multi-language
- Automatic monitoring of light source temperature
high temperature automatic protection
- Intelligent cooling system
- DMX512 Software update
- Display light use time
- Low level linearity, flicker free film TV
- 100% brightness without stroboscopic problem
- Menu setting by internal rechargeable battery
without power supply
(3.7V rechargeable lithium-ion battery)
- Intelligent control of wind speed
- Reverse display
- Manual programming
- Memory function (SNAP-SHOT)
- Maintenance mode

POWER SUPPLY AND CONNECTIONS

- Input voltage: 100V~240V AC 50/60Hz
- Power consumption: 520W@220V
- Power socket: power connector input&output
- DMX and RDM data in/out: Locking 3-pin/5-pin XLR

HOUSING

- Environmentally friendly flame retardant materials
- High temperature resistant engineering plastics
- Intellectual property rights of appearance
and structure design

IP GRADE

- IP:20

DIMENSION

- Product Size: 300 x 212 x 397 MM
-11.81"x 8.35"x 15.63"
- Carton size(1in1): 520 x 330x 320 MM
-19.29"x 16.14"x 12.60"
- Flight case size(4in1): 830 x 530 x 620 MM
-32.68"x20.87"x 24.41"
- Flight case size(6in1): 1200 x 520 x 600 MM
-47.24"x 20.47"x 23.62"

WEIGHT

- Net weight: 6KG

